

THE POSSIBILITIES ARE INFINITE


FUJITSU

# fi-5750C

Image Scanner



**A3** COLOR  
DUPLEX  
DOCUMENT  
SCANNER

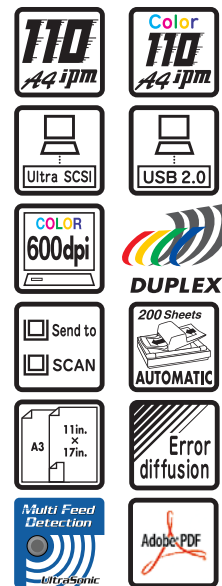

Adobe  
Acrobat 6.0  
Standard

● Convert any document to a PDF file

for Microsoft® Windows® 95/98/Me/NT4.0/2000/XP

Bundled!



● FUJITSU TWAIN Driver



● Genuine Pixel Translations ISIS driver



We care for the Earth

QUALITY SCANNER

\*As an ENERGYSTAR® Partner, Fujitsu has determined that this product meets the ENERGYSTAR® guidelines for energy efficiency. ENERGYSTAR is a U.S. registered mark.



## TECHNICAL SPECIFICATIONS

The fi-5750C image scanner with dual interface capability (Ultra SCSI and USB 2.0) expands the market for production scanning. These features will insure Fujitsu's customers productivity well into the future.

- High speed scanning at high resolution
  - 30ppm A4/LT Landscape at 600dpi
  - 55ppm/110ipm A4 Portrait at 300dpi
- Superior paper Handling
  - Ultrasonic Multi Feed Detection
  - De-skew & Auto-cropping (TWIN & ISIS driver)
  - Straight paper path and easy maintenance
- Excellent Image quality
  - Optical resolution 600dpi
  - Selectable background (B&W)
  - Image Processing Software (Option)
- Ergonomic ADF
  - ADF position selectable: 2 (two) positions (Center, Left)
  - ADF direction: 2 (two) direction is selectable for left-handed / right-handed person, when ADF is Center.



Scanner Type		ADF (Automatic Document Feeder) and FB (Flatbed)	
Image Sensor Type		Color CCD (Charge-coupled device) x 3	
Light Source		White cold cathode discharge lamp	
Optical Resolution		600 dpi x 600 dpi	
Output Resolution	Color	50 - 600 dpi	
	Grayscale	50 - 600 dpi	
	Binary	50 - 600 dpi	
AD Converter		1024 levels	
Gray Scale Level	Color	24 bit / pixel	
	Grayscale	8 bit / pixel	
	Binary	1 bit / pixel	
Scanning speed (A4 portrait)	Color	200 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
		300 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
	Binary	200 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
		300 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
Document Size	Minimum	ADF and FB	A8 (53 x 74 mm)
	Maximum	ADF	A3 (297 x 420 mm) or 11 in x 17 in (279.4 x 431.8 mm)
		FB	A3 (297 x 420 mm) or 12 in x 18 in (304.8 x 457.2 mm)
Document Weight (Thickness)		A4 Size or smaller: 41 to 203 g/m <sup>2</sup> , or 11 to 54 lb Over A4 size: 52 to 203 g/m <sup>2</sup> , or 13.9 to 54 lb	
Capacity		Chute: Maximum 200 sheets at A4, 20 lb, or 80 g/m <sup>2</sup> Stacker: Maximum 300 sheets at A4, 20 lb, or 80 g/m <sup>2</sup>	
Interface		Ultra SCSI (Half-pitch 50 pin) x 1, USB 2.0 x 1 Also works with USB 1.1	
Connecter shape		Shield type 50 pin (pin type 50 pin)	
Halftone patterns		Error diffusion, Dither (Standard)	
Voltage or Voltage Range		AC 100 to 240 V, +10 % / -10 %	
Power		Operating: 216 W Sleep mode: Less than 12 W	
Operation environment	Temperature	Temperature: 5 to 35 Degree C (42 to 95 Degree F)	
	Relative humidity	Relative humidity: 20 to 80 % (Non-condensing)	
Dimensions	Width	690 mm (27 in)	
	Depth	500 mm (20 in)	
	Height	342 mm (13 in)	
Weight		35 kg (77 lb)	
Others	Multi feed detection	Yes (Standard) Ultrasonic sensor and Length check sensor	
	Long paper scanning	863 mm(34 in), Binary/Grayscale/Color	
	Paper counter	Yes	

### Consumables

Pick roller Set	PA03338 - K011	Lifetime: Every 250,000 sheets or one year
Brake roller	PA03338 - K010	Lifetime: Every 250,000 sheets or one year

Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries.  
 ISIS, QuickScan and their respective logos are trademarks or registered trademarks of Pixel Translations, a division of Captiva Software Corporation.  
 Adobe, Adobe logo and Acrobat are either registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.  
 Other product names are the trademarks or registered trademarks of the respective companies.  
 Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition January 2004

### Japan contact

**PFU LIMITED**  
 International Sales Dept., Image Business Division,  
 Products Group  
 Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,  
 Kawasaki-city, Kanagawa 212-8563, Japan  
 Phone: (81-44) 540-4658 Fax: (81-44) 540-4639  
<http://imagescanner.fujitsu.com>

### XXXXXXXX contact

**FUJITSU** x x x x x x  
 x x x x x x x x x x x x  
 x x x x x x x x x x x x  
 x x x x x x x x x x x x  
 x x x x x x x x x x x x  
 Phone: (1-23) 456-7890 Fax: 123-456  
<http://www.x x x x .com/>

